


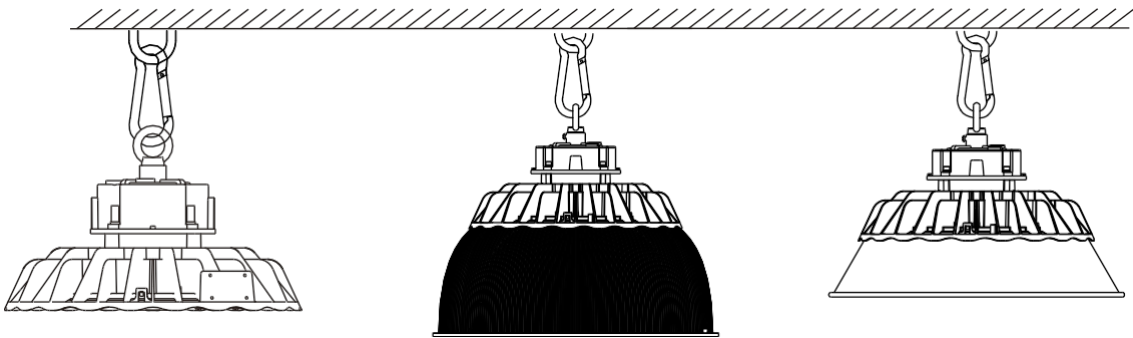


Highbay LED LUNARIS3


Manuel d'instructions

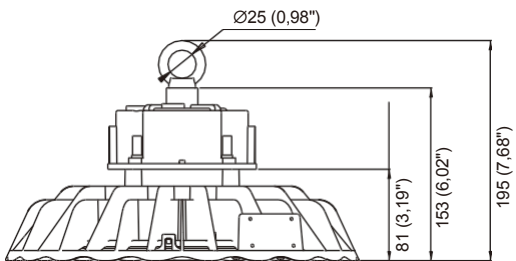





Dimensions physiques (unité : mm/pouces)

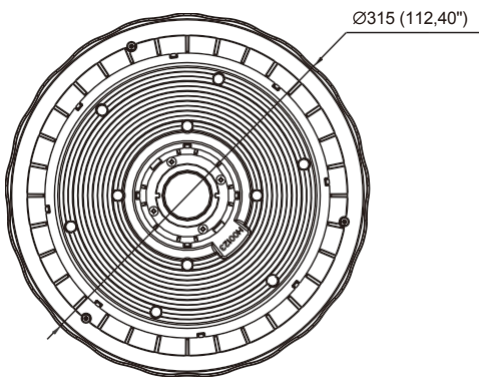


150 W/200 W

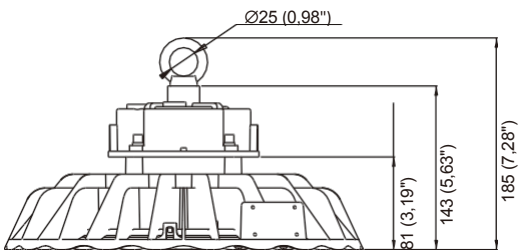

100 W/120 W

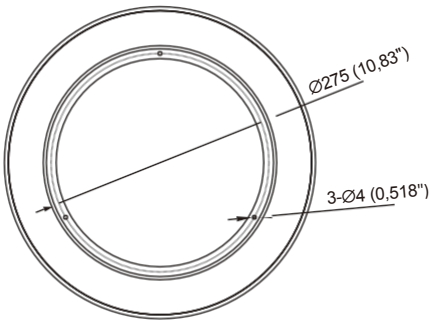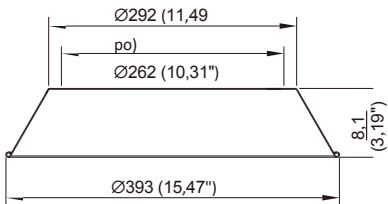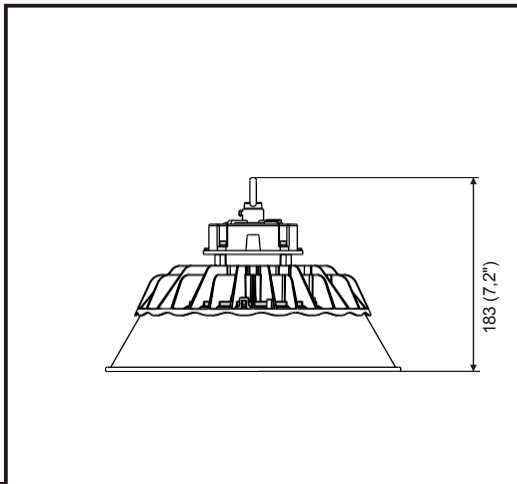

Manuel d'instructions

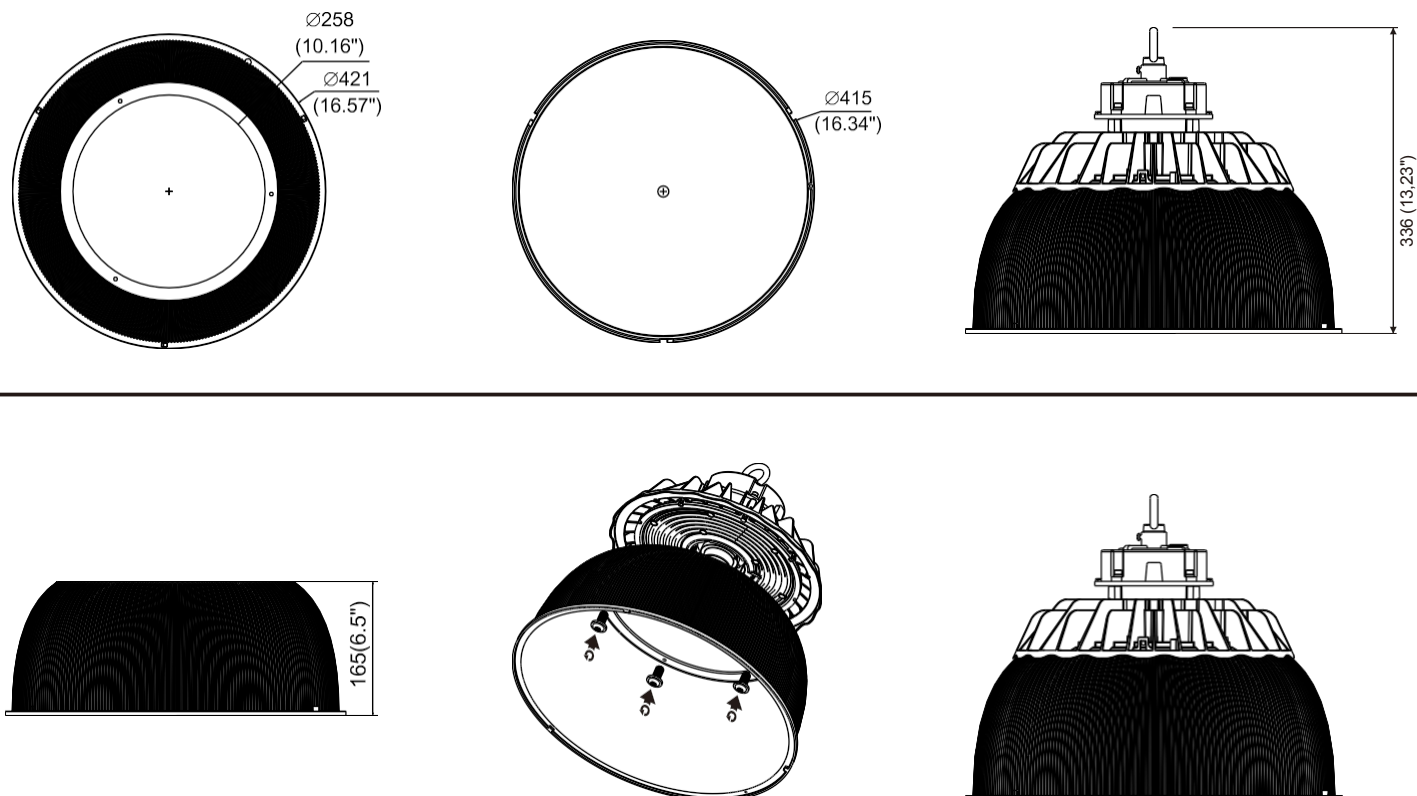

Spécifications du produit	100 W/120 W	150 W/200 W
Dimensions (L x l x H)	Ø315 x 185 (12,4" x 7,28")	Ø315 x 195 (12,4" x 7,68")
Poids (pilote inclus)	4,7 ± 0,3 kg (10,36 ± 0,66 lb)	5 ± 0,3 kg (11,02 ± 0,66 lb)
Tension d'entrée	100-240 V/100-277 V	
Working Temperature	-30 °C à + 50 °C (-22 °F à 122 °F)	
Storing Temperature	-40 °C à +70 °C (-40 °F à +158 °F)	

L	marron	noir	Dimmable				
N	bleu	blanc	DIM+ / DA1	bleu	marron	violet	blanc
⊕ GND	jaune/vert	vert	DIM- / DA2	blanc	bleu	gris	noir

·Si le câble ou le cordon flexible externe de ce luminaire est endommagé, il doit être remplacé exclusivement par le fabricant, son agent de service ou une personne qualifiée similaire afin d'éviter tout danger.